



Goldtouch

KM-4660-DM
USER MANUAL

KM-4660-DM Wireless combo (Keyboard + Mouse)

CONGRATULATIONS ON YOUR PURCHASE

Please read this user manual before using the unit and keep this manual in a safe place for future reference.

Copyright

© 2026 Key Ovation, LLC. All rights reserved.

Trademarks

Goldtouch, the Goldtouch logo and Productivity through Prevention® are registered trademarks of Key Ovation, LLC. All other trademarks are copyright their respective owners. All rights reserved.


Installation

1. Connect the 2.4 Ghz Dongle to an available port USB of your PC.
2. Installation of the device is automatic after Dongle connection to a PC USB port.
3. If the device not working , please disconnect it from your PC and check connect pins for possible damage.



FEATURES DESCRIPTION

- 2.4Ghz +BT office keyboard
- FN-F1~12 Multimedia keys
- System: Wide compatibility with Windows, Mac, Android
- Key number: 104 keys
- Battery capacity: AA*1pcs
- Size: 17.36*6.96*0.86 in
- Weight: 1.25±0.01 lbs.

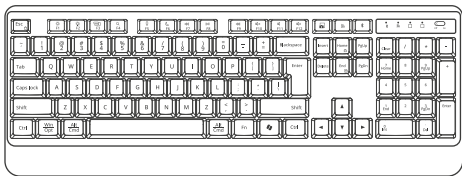


Windows/Mac systems default to function shortcut keys

Fn +	Function description
	ESC & FN function key lock
	Increase screen brightness
	Search
	Sleep
	Play/Pause
	Mute
	Increase volume
	ScrLK function
ESC+K	In 2.4G channel mode, long press "ESC+K" for 3 seconds to enter 2.4G pairing mode - for Dongle replacement
	Default automatic recognition; Hide keys: Click FN+N to switch to Windows system, click FN+M to switch to Mac system
System switch	Default automatic recognition; Hide keys: Click FN+N to switch to Windows system, click FN+M to switch to Mac system

Fn +	Function description
	Lower screen brightness
	Multitasking
	(Win: Dictation (Win+H), Mac:Siri Command+Space)
	Rewind
	Forward
	Lower volume
	Short press (1s): Switch channel Long press (3s): Bluetooth pairing
	Short press: Switch to 2.4G channel Long press: No function
	Green light: 2.4G light - Entering channel: Green light stays on for 1 second; pairing status: green light flashes quickly, reconnection status: green light flashes slowly, reconnection successful: stays on for 5 seconds
	Green light: Caps light On/Off: Green light stays on/turns off
	Red light: Low battery Red light flashes quickly
	Win: Copilot (shortcut: Win+Shift+F23) Mac: Switch applications (shortcut: Command+Tab)
End	Application key function

Reset to factory settings Hold down "FN+Delete" for 5 seconds to restore the keyboard to factory settings. After successful restoration, all indicator lights will flash three times (only Bluetooth settings are restored; the 2.4G pairing status is retained).

MOUSE FUNCTIONAL DESCRIPTION

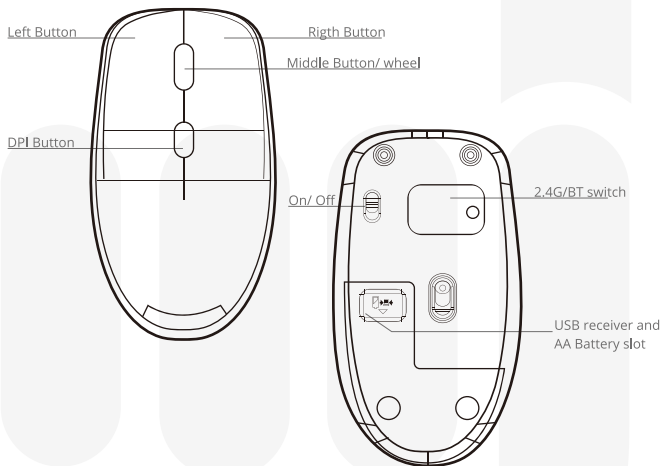

Technical Specification (Mouse)

Number of the keys : 4
(Left/Right/Scroll wheel/DPI)

Report Rate: 250 HZ

Sensor: FCT3065

DPI: 1600DPI

Current consumption <100

Battery: AA*1pcs

Dimension (W x H x L):
4.72 x 2.44 x 1.18 in (±0.03 in)

Weight: 0.2±0.006 lbs

HOW TO PAIR (DONGLE CONNECTS BOTH KEYBOARD + MOUSE)


2.4 Ghz Wireless Connection Steps

- Power on the mouse
- Short press (1 sec) mode switch button to 2.4 Ghz channel
- Indicator light will flash green for 2.4 Ghz
- Insert the 2.4 Ghz receiver into the computer USB port for pairing
- Pairing success: indicator flashes 3 sec, then turns off
- Pairing failure: indicator light is off, mouse goes into sleep mode
- If the mouse is idle, short press any key 1 sec or move the mouse to reconnect.

Bluetooth Wireless Connection Steps

- Power on the mouse
- Short press (1 sec) mode switch button to Bluetooth channel
- Long press (3 sec) Bluetooth channel indicator light flashes into pairing mode
- Select Add Bluetooth Device on your Mac or PC
- Pairing success: indicator light flashes 3 sec, then turns off
- Pairing failure: indicator light is off, mouse goes into sleep mode
- If the mouse is idle, short press any key 1 sec or move the mouse to reconnect.

1. ON/OFF switch
2. Mode Switch
3. Mode display lamp (2.4G is green, BT is Blue)

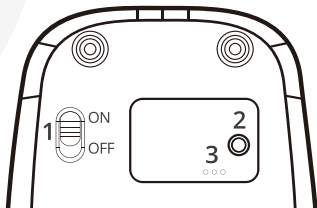

NOTE

- Technical specifications given in this table are supplemental information and cannot give occasion to claims.
- Technical specifications are subject to change without notice due to improvement of **Goldtouch** production.
- Technical support by **Goldtouch Support**.



GENERAL

- This product conforms to the US and EU requirements.
- The product is made in accordance with RoHS standards. The product is made on accordance with FCC & CE standards. The standards were issued in order to decrease the amount of electronic and electrical waste emitted into the atmosphere.
- The WEEE symbol (the crossed-out wheeled bin) indicates that this product is not home waste. Please protect the environment by recycling appropriately. In order to get detailed information about recycling this product, please contact your retailer or local authority.

CERTIFICATIONS



WARRANTY

There is a one year manufacturer's warranty from date of original purchase date. Customer must submit an RMA form and obtain an RMA number before shipping product back. If product tests non-defective, is damaged, or submitted due to human error then customer is responsible for all shipping costs for return to Goldtouch and back.

After 30 days, customer is responsible for shipping costs to have items sent back for testing.

If defective, Goldtouch will return, at our cost, a replacement factory refurbished product. Warranty for the replacement item continues from the original date of purchase.

The one year warranty does not cover Abuse or Normal wear.

Register your product online:

<https://www.goldtouch.com/support/warranty-registration/>

Important: Be sure to retain your proof of purchase and for non-European purchasers we recommend registering your Goldtouch Keyboard as it may be required for warranty service.

Information in this document is subject to change without notice. No part of this document may be reproduced or transmitted in any form or by any means, electronically or mechanical, for the purpose, without the express written permission of Key Ovation, LLC. All trademarks are the property of their respective owners.

© Key Ovation LLC; All Rights Reserved.



Goldtouch

TECHNICAL SUPPORT
HAVING TECHNICAL PROBLEMS
WITH THIS PRODUCT?

Send a mail to support@goldtouch.com
for more information, please visit
www.goldtouch.com