



**Goldtouch**

**KB-X211-TM**  
**USER MANUAL**

Trident Mini Keyboard

## CONGRATULATIONS ON YOUR PURCHASE

Please read this user manual before using the unit and keep this manual in a safe place for future reference.

### Copyright

© 2026 Key Ovation, LLC. All rights reserved.

### Trademarks

Goldtouch, the Goldtouch logo and Productivity through Prevention® are registered trademarks of Key Ovation, LLC. All other trademarks are copyright of their respective owners. All rights reserved.


### Installation

1. Choose your preferred connection type: USB Wired, 2.4 Ghz Wireless with Dongle, or Bluetooth.
2. Follow the appropriate pairing instructions on the “Pair the Keyboard to Device” section.

\*Please note that selecting the connection type utilizes the FN key.



# FEATURES DESCRIPTION

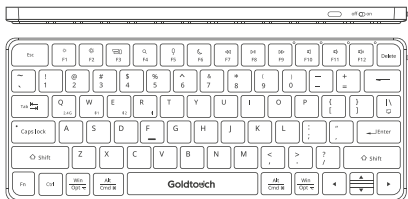



- **Model name:** Trident Mini Keyboard
- **Solution:** USB + 2.4GHZ + 2 Channel Bluetooth keyboard, rechargeable
- **Layout:** US Layout
- **Battery:** 300mAh

## Windows/Mac systems default to function shortcut keys

Mac systems default to function keys, while Windows systems default to F1-F12 keys. Windows FN + Multimedia Key to engage function.

Mac no need for FN + Multimedia Keys. Mac System default is to engage function keys.

FN+Multimedia key	Windows	Multimedia key	MAC
FN + F1	Brightness -	F1	Brightness -
FN + F2	Brightness+	F2	Brightness+
FN + F3	Multitasking window	F3	Multitasking window
FN + F4	Search	F4	Search
FN + F5	Microphone (Long press 0.5 sec)	F5	Microphone (Long press 0.5 sec)
FN + F6	Sleep	F6	Sleep
FN + F7	Previous	F7	Previous
FN + F8	Play/Pause	F8	Play/Pause
FN + F9	Next	F9	Next
FN + F10	Mute	F10	Mute
FN + F11	Volume-	F11	Volume-
FN + F12	Volume+	F12	Volume+
FN + Backspace	Delete	FN + Backspace	Delete
FN + 	Snip Tool/Screen Shot	FN + 	Screen Shot



**Remarks:** •When turning on the keyboard , note the connection status indicators for the first 4-5 seconds , if not successfully connected, the keyboard will enter pairing mode of your last selected choice.

- If Keyboard doesn't connect successfully within 3 minutes it will enter standby mode.

## Specifications

- **Keyboard Key Type:** Multi Connection Low Profile Keyboard.
- **Material:** ABS
- **Key mechanism:** Scissor switch
- **Connection interfaces:** 2.4G+BT1+BT2+USB
- **Type of keycaps:** Low Profile / SilkScreen
- **Material of keycaps:** ABS
- **Number of keys:** 78 Keys
- **Number of multimedia keys:** 13 keys
- **Battery:** 300mAh
- **Battery Operating time:** 6 Months after full charge
- **Cable for charging the device:** Yes, cable provides charging and USB wired Connectivity
- **Power cord length:** 1.5 Meter
- **Moisture protection:** Yes
- **Keyboard size:** 11.10\*4.6\*0.45in
- **Weight Keyboard:** 1.06 ± .01lbs
- **Compatibility:** MAC/Windows






## Pair the keyboard to device (Quickview)

2.4G	Press (3s) FN+Q: Switches to 2.4G channel and pairing mode, Insert the USB dongle into the device. Once the LED light stops flashing, it is ready for use.
BT 1	Press (3s) FN+W: Switches to BT1 Channel Pairing mode, The BT Ch1 LED turns on and flashes 1time /s, now select Bluetooth KB on your host computer: KB-X211-1, and select Connect. After pairing completes the LED goes off.
BT 2	Press (3s) FN+E: Switches to BT2 Channel Pairing mode, The BT Ch2 LED turns on and flashes 1time /s, now select Bluetooth KB on your host computer: KB-X211-2 on your device, and select Connect. After pairing completes the LED goes off.
	Two-position toggle switch on the right side of keyboard: Up for MAC systems, down for Windows systems
OFF  ON	Two-position toggle switch: Left side for power off (OFF), Right for power on (ON)

Note1: Mac systems default to function keys, while Windows systems default to F1-F12 keys.

Note2: Product ships pre-paired with dongle. Instructions are for dongle replacement if lost.

## Description of indicator light

Indicator	Color	function	Description
 USB Mode	Red	Charging Wired : FN+R	<b>Low Battery/Charging Indicator:</b> Low Battery Status: Red light flashes rapidly <b>Charging Status:</b> Red light stays on solid, <b>Fully Charged Status:</b> Red light turns off <b>Wired Indicator Light:</b> Red light stays on in wired mode
 2.4 GHZ Mode	Blue	2.4G : FN+Q	<b>2.4G Indicator Light:</b> - Slow blue flashing during reconnection - Fast blue flashing during pairing - Solid blue light for 1 second followed by off after successful reconnection/pairing
 BT Channel	Blue	Bluetooth 1: FN+W	<b>Bluetooth 1 Indicator:</b> Slow blue flashing during reconnection; fast blue flashing during pairing; steady blue light for 1 second
 BT Channel	Blue	Bluetooth 2: FN+E	<b>Bluetooth 2 Indicator:</b> Slow blue flashing during reconnection, fast blue flashing during pairing; steady blue light for 1 second
 Caps lock	Green	Caps lock indication	<b>CAPSLock Indicator light:</b> Green light stays on when Caps Lock is enabled; otherwise, it turns off.

# HOW TO PAIR (STEP-BY-STEP)

MOVE SLIDER SWITCH ON THE SIDE OF KEYBOARD TO MAC OR PC MODE.

## 2.4 Ghz Wireless Re-Connection Steps (For Dongle Replacement)

- Power on the keyboard
- Long Press (3s) FN+Q: Switches to 2.4G channel and pairing mode. Fast blue flashing during pairing mode.
- Insert the USB dongle into the host device.
- Solid blue light for 1 second followed by off after successful reconnection/ pairing.
- Once the LED light stops flashing. It is ready for use.

## Bluetooth Wireless Connection Steps

### Channel 1

- Long press (3s) FN+W: Switches to BT Channel 1 Pairing mode. The BT Ch1 LED turns on and flashes 1 time/ per second.
- Select Add Bluetooth Device on your host computer.
- Select Bluetooth KB on your host computer: KB-X211-1, and select Connect. After pairing completes the LED goes off.

### Channel 2

- Long press (3s) FN+E: Switches to BT Channel 2 Pairing mode. The BT Ch2 LED turns on and flashes 1 time/ per second.
- Select Add Bluetooth Device on your host computer.
- Select Bluetooth KB on your host computer: KB-X211-2, and select Connected. After pairing completes the LED goes off.

## USB Wired

- Plug in USB Cable to Keyboard and connect to host computer
- Short Press (1s) FN+ R to switch to USB connected mode.

### Note:

Once paired or connected via USB you may switch to other modes by a Short Press FN+"Channel Selection". All previous pairings are retained unless you re-pair 2.4Ghz or Bluetooth Devices using the pairing steps above.



## NOTE

- Technical specifications given in this table are supplemental information and cannot give occasion to claims.
- Technical specifications are subject to change without notice due to improvement of **Goldtouch** production.
- Technical support by **Goldtouch Support**.



## GENERAL

- This product conforms to the US and EU requirements.
- This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:
  1. This device may not cause harmful interference.
  2. This device must accept interference received, including interference that may cause undesired operation.
- The product is made in accordance with RoHS standards. The product is made in accordance with CE standards. The standards were issued in order to decrease the amount of electronic and electrical waste emitted into the atmosphere.
- The WEEE symbol (the crossed-out wheeled bin) indicates that this product is not home waste. Please protect the environment by recycling appropriately. In order to get detailed information about recycling this product, please contact your retailer or local authority.

## CERTIFICATIONS



# WARRANTY

There is a one year manufacturer's warranty from date of original purchase date. Customer must submit an RMA form and obtain an RMA number before shipping product back. If product tests non-defective, is damaged, or submitted due to human error then customer is responsible for all shipping costs for return to Goldtouch and back.

After 30 days, customer is responsible for shipping costs to have items sent back for testing.

If defective, Goldtouch will return, at our cost, a replacement factory refurbished product. Warranty for the replacement item continues from the original date of purchase.

**The one year warranty does not cover Abuse or Normal wear.**

**Register your product online:**

***<https://www.goldtouch.com/support/warranty-registration/>***

**Important:** Be sure to retain your proof of purchase and for non-European purchasers we recommend registering your Goldtouch Keyboard as it may be required for warranty service.

Information in this document is subject to change without notice. No part of this document may be reproduced or transmitted in any form or by any means, electronically or mechanical, for the purpose, without the express written permission of Key Ovation, LLC. All trademarks are the property of their respective owners.

© Key Ovation LLC; All Rights Reserved.



**Goldtouch**

**TECHNICAL SUPPORT**  
**HAVING TECHNICAL PROBLEMS**  
**WITH THIS PRODUCT?**

Send an email to [support@goldtouch.com](mailto:support@goldtouch.com)  
for more information, please visit  
**[www.goldtouch.com](http://www.goldtouch.com)**